

FILING FEE: calculated below (after accounting for any preliminary amendment or claims cancellations if noted above):

<input checked="" type="checkbox"/>	Total Claims	37	Total Claims Subject to Fees: 17	\$306
<input checked="" type="checkbox"/>	Independent Claims	5	Total Claims Subject to Fees: 2	\$156
<input checked="" type="checkbox"/>	Multiple Dependent Claims			\$
<input checked="" type="checkbox"/>	Basic Filing Fee			\$690
<input type="checkbox"/>	Extension Fees			\$
	Sub-Total			\$
<input type="checkbox"/>	Less Small Entity Fee Reduction			\$
<input type="checkbox"/>	Assignment Recordal Fees			\$
	Total Fees			\$1,152.00

- ☒ A check in the amount of \$1,152.00 is enclosed (must at least cover the basic fee). If no check or an insufficient check is enclosed and a fee is due herewith, the Commissioner is authorized to charge any fee or additional fee due in connection herewith to Deposit Account No. 07-0900. A duplicate of this sheet is enclosed.
- ☒ In the event that a petition for extension of time is required to be submitted in the pending prior application, and in the event that a separate petition for the pending prior application is not filed on even date, applicant hereby petitions under 37 C.F.R.1.136(a) for an extension of time in the pending prior application of as many months as are required to render this submission timely. The Commissioner is authorized to charge any fee or additional fee due in connection with this communication to Deposit Account No. 07-0900. A duplicate copy of this sheet is enclosed.

Respectfully submitted,

Date: 10 January 2002

John A. O'Toole

By: John A. O'Toole
Registration No.: 28,336

General Mills Number One General Mills Blvd P O Box 1113 Minneapolis, MN 55440-1113

**AN APPARATUS FOR PACKAGING GOODS IN AN OPEN-BOTTOMED
CONTAINER AND METHOD FOR DOING THE SAME**

TECHNICAL FIELD

This invention relates to the packaging of goods. More specifically, this invention relates to a method and apparatus of packaging goods in open-bottomed containers.

BACKGROUND

Packaging goods in containers for shipment was originally done by hand. Packaging by hand requires a person to unfold a container to be used, pack it, and then seal it for shipment. Automation replaces manual activities for more and more of these different packaging jobs, saving both time and money.

The packaging of containers has been automated at every stage of the packaging process. For example, if the containers are cardboard boxes, different machines can unfold them, place them in position to load them, load them, and seal them as well. Unfortunately, separate machines cost more money and take up more space on the production floor. The packaging of goods has numerous problems including cost, ease of operation, and speed.

The machines used for packaging are not only expensive to purchase they are expensive to operate. Operating expenses are first increased by the size of the machines. Current machines are up to ten feet long just for the container-unfolding portion. All of the equipment to unfold a cardboard box container, package it with goods, and seal it can exceed 34 feet in length. A large footprint that takes up a lot of room on the production floor means a larger facility needs to be built and maintained, or less equipment must be utilized.

Another problem with prior art packaging operations is that the operations are
2 complex. As mentioned above, several separate machines are required to do each job
in the packaging operation. First, equipment must be utilized to fold the box. Once
4 the box has been folded, it must then be packaged by a separate machine. Once the
box is packaged, it must finally be sealed by even another machine. Having been
6 sealed the container is then finally ready for shipment. Designing a machine that does
one or more of these jobs simultaneously, and in a small space, would be a great
8 benefit to the cost and simplicity of the packaging operation.

Costs can also be incurred because of the way the boxes are un-packaged by
10 the customer who receives them. When the containers, for example cardboard boxes,
reach the customer, a person often manually unloads the container. Once the palette
12 is unloaded, the containers themselves must be opened. One problem with cardboard
box containers is that they are often opened with a case cutter or other sharp
14 implement. These sharp tools can damage the goods contained therein. As a remedy
to this problem, open-bottomed containers can instead be used. These containers
16 utilize the surface of the palette upon which it is resting, or the top of the container
below it, to replace having a bottom. When the goods are needed, a person simply
18 lifts off the container to get at the goods contained inside.

An apparatus and method is needed for performing all of the above functions.
20 It is further required that the apparatus and method performs compactly, cheaply, and
quickly. Having a simple machine will further lower production costs and reduce the
22 amount of equipment that is on the production floor.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows a perspective view of the packaging system as seen from the operator side of the invention.

Figure 2 is a perspective view from the non-operator side showing the machine from the end of the second conveyor.

Figures 3A, 3B, 3C and 3D are perspective views from over the top the machine showing in detail the cardboard box erecting mechanism.

Figure 4 is a perspective view looking down the first conveyor mechanism.

Figures 5a, 5b and 5c are perspective views showing the loading of the goods into the container and the operation of the guide/support mechanisms.

Figure 6 is a perspective view of the three flap-folding devices.

Figure 7 is a perspective view that looks back upstream along the second conveyor towards where the goods originate.

Figure 8 is a block diagram of the method.

Figure 9 is a block diagram of the operating system.

SUMMARY

One embodiment of the present invention relates to an apparatus for packaging goods in a box. The apparatus comprises a box erecting apparatus for erecting the box to receive at least one good. The apparatus further comprises an elevator lift apparatus operatively positioned below the box erecting apparatus, such that the elevator lift apparatus is positioned to lift at least one good into the erected box.

Another embodiment of the present invention relates to an apparatus for packaging goods in an open-bottomed container. The apparatus comprises an elevator

lift apparatus for lifting at least one good through a bottom of the open-bottomed
container and a support mechanism which is operatively positioned relative to the
elevator lift apparatus for supporting the at least one good in the open-bottomed
container.

A further embodiment of the present invention relates to a method of
packaging goods in a box, the method comprising actuating an elevator lift apparatus
to raise the goods into the box and supporting the goods in the box after the elevator
lift apparatus is lowered.

A final embodiment of the present invention is a method for delivering goods
comprising transporting goods packaged in open-bottomed containers on a palette
whereby the goods may be accessed by lifting the open-bottomed container.

DETAILED DESCRIPTION

Machine Overview

With reference to Figure 1, an embodiment of the packaging machine 10 of
the present invention will be described. As shown in Figure 1, a packaging machine
10 comprises a box magazine 12, a box erector apparatus 14, a first conveyor 16, an
elevator lift apparatus 18, guide/support mechanisms 20 and 22, short flap-folding
mechanisms 24 and 26, a long flap-folding mechanism 28, a box out-feed pusher 30, a
second conveyor 32, a sealing mechanism 38, and a labeling mechanism 34. The box
erector apparatus 14 is positioned so that the open-bottomed container 42 is erected
directly over the elevator lift apparatus 18. The first conveyor 16 is positioned to
deliver goods to the elevator lift apparatus 18. The goods 44 on the elevator lift
apparatus 18 are lifted into the erected container from the bottom. The guide/support
mechanisms 20 and 22 are positioned to facilitate the goods 44 being lifted into the

open-bottomed container 42 and to support the goods once they are loaded into the
2 open-bottomed container 42. Short flap-folding mechanisms 24 and 26 and the long
flap-folding mechanism 28 then fold the top flaps of the open-bottomed container 42
4 closed.

The box out-feed pusher 30 then pushes the loaded open-bottomed container
6 42 containing the goods 44 onto the second conveyor 32. The second conveyor 32 is
adapted to receive the container 42 with the goods 44 from the area of the box erector
8 apparatus 14. The second conveyor 32 transports the containers to the sealing
mechanism 38 and labeling mechanism 34. After the open-bottomed containers 42
10 are past the second conveyor 32 they may be manually loaded onto a palette. The
parts of the present invention herein described utilize air-powered cylinders to actuate
12 movement. However, the air-powered cylinders for any of the parts could be replaced
by any other means known in the art to perform the movements necessary.

14 The packaging machine 10 of the present invention provides a compact,
bottom loading packaging machine that packages goods in an open-bottomed
16 container. In the preferred embodiment the footprint of the machine is approximately
four feet by five feet. Other embodiments of the present invention may have different
18 dimensions. For instance, one embodiment has a four inch wider frame for larger
case sizes, another has a machine width that is approximately fourteen inches
20 narrower. Additionally, a further embodiment has an increased width of two inches,
but still has the same overall machine length.

22 The preferred embodiment herein described utilizes a box made of cardboard.
However, any box or container may be used with the apparatus and method of the
24 present invention. Also, in the preferred embodiment, the cardboard box 42 that is

used has an open-bottom. In this embodiment a flat-folded cardboard box 42 is erected by the machine of the present invention 10 into an open-bottomed cardboard box 42 (see Figs. 3A and 3B). Though the preferred embodiment incorporates an open-bottomed cardboard box as the container, any type of box compatible with the present invention can be utilized.

In one embodiment, the dimensions of the unfolded cardboard box may be 11.5 inches in width, 19 inches in length, and 7.75 inches in height. The goods that are packed in this container may include two cases measuring 9.5 inches in width, 11.5 inches in length, and 7.75 inches in height. The goods to be packaged preferably are of a shape that they will be able to ride the first conveyor 16, touching both the left conveyor belt 132 and right conveyor belt 134 (see Figure 4). Further, as will be discussed later, the goods must also be of a shape that will properly work in conjunction with the guide/supporting mechanisms 20 and 22 described below. It is understood, however, that the following description is relevant to any type of open-bottomed container 42 compatible with this invention.

The Box Magazine

As shown in Figures 2 and 3, a flat-folded cardboard box magazine 12 comprises an upper magazine pin 50 and lower magazine pins 52 and 54 that may be used to hold the flat-folded cardboard box 42 in position. As shown in Figure 2, the flat-folded cardboard box magazine 12 further comprises several support bars 56 on which the flat-folded cardboard boxes 42 are positioned, and an apparatus for insuring the proper positioning of the loaded flat-folded cardboard boxes 42. The flat-folded cardboard box magazine 12 is situated in such a way as to present the flat-folded cardboard boxes 42 in the proper position to be opened by the box erector apparatus

14. As shown in Figure 2, the support bars 56 are positioned above and to the sides of
the flat-folded cardboard boxes 42 to bracket the same and hold them in place.

Referring to Figures 3A and 3B, the flat-folded cardboard boxes 42 are
positioned on the flat-folded cardboard box magazine 12 in such a way that when the
box erector moves suction cups 80 and 82, the suction cups 80 and 82 are in a position
where they can attach against the flat-folded cardboard box 42. The flat-folded
cardboard boxes 42 are maintained so that one is continuously presented for the box
erector apparatus 14 to grab and unfold. The flat-folded cardboard boxes are further
secured into the proper position by magazine pins 57 and 58. However, other
methods known to those skilled in the art may also be used.

Figure 2 shows how, in the preferred embodiment, a wheeled mechanism 60
insures that the flat-folded cardboard boxes 42 are presented in the correct position to
be opened by the box erector apparatus 14. The wheeled mechanism 60 is suspended
upon the support bars 56 of the magazine and abuts the last flat-folded cardboard box
42. This wheeled mechanism 60 is hooked to a wire 62, which goes through a pulley
64 and is attached to a weight 66 suspended below the flat-folded cardboard box
magazine 12. The weight 66 pulls on the wire 62 which in turn pulls on the wheeled
mechanism 60. The wheeled mechanism 60 then puts pressure on the stack of flat-
folded cardboard boxes 42, keeping the same presented in the correct position to the
unfolding by the box erector apparatus 14. Correct positioning of the flat-folded
cardboard boxes 42 could also be accomplished by other means known in the art. An
example of these other means may include a powered magazine feed system.

The Box Erector

As shown in Figures 3A, 3B, 3C, and 3D, the box erector apparatus 14 comprises the attached suction cups 80 and 82, the box erector cylinder 84, the shape guide 86, and the popping mechanism 88. The popping mechanism 88 further comprises a popper pivot point 92, a popper long end 94, and a popper short end 96. In this embodiment the box erector apparatus 14, including the box erector cylinder 84, the suction cups 80 and 82, and the shape guide 86 are operatively attached to the first conveyor 16. The popping mechanism 88 is positioned relative to the shape guide 86 and the first conveyor 16.

In operation, the box erector apparatus' 14 attached suction cups 80 and 82 are moved across the gap above the elevator lift plate 150 by the box erector cylinder 84 (Figs. 3A and 3B). The box erector cylinder 84 is attached to the operator side of the box erector apparatus 14. In this embodiment, the cylinder 84 is powered by air pressure, but the cylinder 84 can be powered by other means well known in the art. In Figure 3A the suction cups 80 and 82 come into contact with the box and begin to retract. The box erector cylinder 84 then retracts the suction cups 80 and 82 and begins drawing the flat-folded cardboard box 42 across the area above the elevator lift plate 150. Figures 3A and 3B show the box erector cylinder 84 beginning to retract. The flat-folded cardboard box 42 forms the shape of a rhombus. The trailing side of the flat-folded cardboard box 98 is anchored to the flat-folded box magazine 12 by an upper magazine pin 50 and a lower magazine pins 52 and 54 connected to the flat-folded cardboard box magazine 12. As the cylinder 84 finishes retracting the suction cups 80 and 82, two other parts of the box erector apparatus insure that the box takes the proper shape.

The shape guide 86 see in Figure 3C aids the box erector apparatus 14 to
2 unfold and form the cardboard box 42 in a small area. The shape guide 86 may be
made out of plastic, or any other stiff substance known in the art. The shape guide 86
4 is operatively connected to the first conveyor 16 and the popping mechanism 88. The
cardboard box trailing edge 98 of the flat-folded cardboard box 42 comes into contact
6 with the curved surface of the shape guide 86. As the flat-folded cardboard box 42 is
dragged across the opening above the elevator lift apparatus (Figure 3A), the curved
8 shape of the shape guide 86 pushes the trailing edge 98 of the flat-folded cardboard
box 42, causing the flat-folded cardboard box 42 to take on a more rectangular shape.

10 At this point in the process a popping mechanism 88 “kicks” the cardboard
box 42 to further insure the cardboard box 42 takes the proper rectangular shape. As
12 seen in Figure 3C, the popping mechanism has a long end 94 and a short end 96 on
each side of the popping mechanism 88 popper pivot point 92. The popper long end
14 94 swings around the popper pivot point 92 to contact the trailing edge 98 of the flat-
folded cardboard box 46. The position of the popping mechanism shown in Figure
16 3C is as it would appear after “kicking” the cardboard box. The ready position is with
the long end 94 rotated back underneath the shape guide 86. The popping mechanism
18 88 kick helps to complete the formation of the flat-folded cardboard box 42 into a
rectangular cardboard box 42 as shown in figure 3D. The popper mechanism 88 in
20 this embodiment is powered by a spring, but could be powered by any means known
in the art.

22 As the box erector cylinder 84 completes its retraction cycle, the upper
magazine pin 50 that was anchoring the side of the cardboard box fits through the
24 natural break between the long flap 100 and the short flap 104 of the cardboard box

42 (Figure 3D). The box also comes off of the lower magazine pins 52 and 54 located
on the bottom of the cardboard box magazine. In this way, the cardboard box 42 is
unfolded into its correct shape, resting in a position above the elevator lift apparatus
18 and ready to accept the goods 44 when they are raised by the elevator lift apparatus
18.

One advantage of this invention is that the box is unfolded into the proper
shape in one step and in one small area. The box erector apparatus 14, including the
shape guide 86 and popping mechanism 88, opens the flat-folded cardboard box 42 in
the area just over the elevator lift apparatus 18. As mentioned above, this is the same
area in which the goods 44 will be loaded into the just formed cardboard box 42.

Another of the advantages of this invention is that the box erector apparatus 14
erects the open-bottomed containers in the exact position where the goods 44 will be
loaded. There is no need to transport the open-bottomed container after it has been
erected, rather the goods 44 can be loaded into the open-bottomed container 42 right
after it is erected. Unfolding and loading in the same place speeds the process by
eliminating transport steps; this also helps to reduce on the size of the machine.

The First Conveyor

As shown in Figure 4, the first conveyor 16 comprises a stopping block 120, a
first guide bar 124, and a second guide bar 126. The first conveyor 16 further
comprises an open space 130 formed by a left conveyor belt 132 and a right conveyor
belt 134. The first guide bar 124 and second guide bar 126 are operatively connected
over the top of the left conveyor belt 132 and right conveyor belt 134. The stopping
block 120 is operatively connected to the downstream end of the first conveyor 16.

The goods 44 to be packaged in the container 42 are placed on the first conveyor 16. The first conveyor 16 moves the goods 44 until they come into contact with the stopping block 120. The stopping block 120 stops the movement of the goods 44 such that the goods 44 are positioned directly over the elevator lift apparatus 18. The first and second guide bars 124 and 126 insure that the goods 44 do not fall off the left conveyor belt 132 and right conveyor belt 134 when they are moving along the first conveyor 16. The upper guide 128 (Figure 3C) also insures proper movement of the goods 44 along the first conveyor 16.

The Elevator Lift Apparatus

As shown in Figure 4, the elevator lift apparatus 18 comprises an elevator lift plate 150, an elevator lift plate base 152 (see Figure 5a), and an elevator lift column 154. The elevator lift apparatus 18 may be positioned between the left conveyor belt 132 and the right conveyor belt 134, just before the stopping block 120. The bottom of the elevator lift plate 150, the elevator lift plate base 152, is operatively attached to the top of the elevator lift column 154. The bottom of the elevator lift column 154 is attached to a mechanism 156 for moving the elevator lift column 154, and the elevator lift plate 150, from a down position to an up position.

Once the proper amount of goods 44 are in place over the top of the elevator lift apparatus 18, the elevator lift plate 150 moves from a down position to an up position by the action of the elevator lift column 154. Figure 4 shows the elevator lift apparatus 18 in the down position. In this embodiment, the elevator lift column 154 is actuated by an air compressor, but can be driven by any means known to those skilled in the art. When the elevator lift plate 150 is lifted, the goods 44 are moved up towards the cardboard box 42. The elevator lift apparatus 18 lifts the goods 44 into

and through the bottom of the cardboard box 42. As shown in Figures 5a and 5b, the elevator lift plate 150 fits between the guide/support mechanisms 20 and 22. While the goods 44 are lifted, they come into contact with the guide/support mechanisms 20 and 22 which are positioned over the left conveyor belt 132 and right conveyor belt 134 of the first conveyor 16. The elevator lift plate 150 is designed with a dimension that insures that it can fit between the rest position of the guide/support mechanisms 20 and 22 without coming into contact with the same. After the elevator lift column pushes the elevator lift plate 150 to its up position, the elevator lift column 154 retracts the elevator lift plate 150 back to its original down position. After the elevator lift plate 150 reaches its original down position it is ready to lift the next set of goods 44 to be packaged.

The Guide/Support Mechanisms

As shown in Figures 4 and 5a, 5b, and 5c, the guide/support mechanisms 20 and 22 comprise a bottom edge 170 and 172, a rotational pivot point 174 and 176, and a top edge 178 and 180. The guide/support mechanisms 20 and 22 are operatively attached to the first conveyor 16 in a position so that they rest above and to either side of the elevator lift apparatus 18. In this embodiment the guide/support mechanisms 20 and 22 have an interior width between them defined by the distance between the top edges of the guides 178 and 180. The guide/support mechanisms 20 and 22 also have an exterior width that is defined by the bottom edges of the guides 170 and 172. The guide/support mechanisms 20 and 22 each further have a rotational pivot point 174 and 176. Each guide may be able to rotate the interior top edge 178 and 180 upwards and outwards. However, the guide/support mechanisms 20 and 22 may not rotate the top edge 178 and 180 downwards. In this embodiment the guide/support

mechanisms 20 and 22 are long flat rectangular shapes with another flat portion

angled at a 90° bookend to the long position. (Shown in Figure 5a). The long flat portion is what the goods 44 contact and push open.

In this embodiment the guide/support mechanisms 20 and 22 are placed in a position so that the width of the goods 44, as measured perpendicular to the direction of motion, is wider than the interior width defined by the top edges 178 and 180. The width of the goods 44 must be additionally smaller than the width between the rotational pivot points 174 and 176 (Figure 5a). As the guide/support mechanisms 20 and 22 pivot at each pivot point, the top edges 178 and 180 of each guide/support mechanism 20 and 22 rotate in an upward and outward arc. As shown in Figure 5b, when the guide/support mechanisms 20 and 22 rotate, the top edges 178 and 180 come into contact with the interior of the cardboard box 42. This funnel action insures that the goods 44 are lifted cleanly into the cardboard box 42, by preventing the goods 44 from binding against the bottom edges of the cardboard box 42. As the elevator lift apparatus 18 continues to rise, the goods 44 clear the top edges 178 and 180 of the guide/support mechanisms 20 and 22, allowing the guide/support mechanisms 20 and 22 to fall back into their original angled position (Figure 5c).

Figure 5c shows the goods after the elevator lift apparatus 18 has lifted the goods 44 inside of the cardboard box 42. When the goods are inside the cardboard box 42, the elevator lift plate 150 connected to the top of the elevator lift apparatus 18 now begins to descend back to its down position. The elevator lift plate 150 fits back in between the guide/support mechanisms 20 and 22. As the goods 44 come into contact with the top edges 178 and 180 of the guide/support mechanisms 20 and 22, the goods 44 come to a rest on top of the guide/support mechanisms 20 and 22 (Figure

5c). The guide/support mechanisms 20 and 22 support the weight of the goods 44 because the guide/support mechanisms 20 and 22 are designed so that the top edges 178 and 180 do not rotate downwards past their rest position. The goods 44 rest on the support/guide mechanisms 20 and 22 inside the cardboard box 42.

Several more advantages of this invention are present in the act of lifting the goods 44 into the open-bottomed container. First, the duality of function of the guide/support mechanisms 20 and 22 is an advantage. The guide/support mechanisms 20 and 22 act as the funnel to insure that the goods 44 do not bind up against the side of the box. The guide/support mechanisms 20 and 22 also serve as the support upon which the cardboard box 42 and goods 44 rest after loading. This multi-tasking saves space and lowers cost. Furthermore, this versatility enables the goods 44 to be guided into the open-bottomed container, the guides to be removed, and then the goods 44 to be supported in a very short time frame with a great economy of movement.

Another advantage is that the cardboard box 42 is loaded in the same place that the cardboard box 42 is erected. The suction cups 80 and 82 used by the box erector 92 to start the opening of the preferred embodiment's flat-folded cardboard box 42 are still attached to the cardboard box 42 as it is packaged with the goods 44. These suction cups 80 and 82 serve to stabilize the box so that it does not shift as the goods 44 are raised by the elevator lift plate 150 and guided by the guide/support mechanisms 20 and 22 into the bottom of the cardboard box 42.

The Flap-folding Mechanisms

As is shown in Figure 6, the short flap-folding mechanisms 24 and 26 comprise two flap-folding cylinders 190 and 192 and two flap-folding fingers 194 and 196. The long flap-folding mechanism 28 comprises a long flap-folding cylinder 198

and a U-shaped bar 200. All of the flap-folding mechanisms are attached above the cardboard box 42 and either upstream (24) or downstream (26 and 28) of the elevator lift apparatus 18. In this embodiment, the short flap-folding cylinders 190 and 192 and the long flap-folding cylinder 198 are all powered by air pressure. Other mechanical means can be substituted by those skilled in the art. Figure 6 shows a view from the top of the cardboard box 42. The elevator lift apparatus 18 has just raised the goods up through the bottom of the cardboard box 42, and the goods 44 are now resting on top of the guide/support mechanisms 20 and 22. The suction cups 80 and 82 can be seen as still in contact with the side of the cardboard box 42. The two short flap-folding mechanisms 24 and 26 can be seen as well as the long flap-folding mechanism 28. The box out-feed pusher 30 is also shown.

At this step in the process, the short flap-folding cylinders 190 and 192 of the short flap-folding mechanisms 24 and 26 move the short flap-folding fingers 194 and 196. The short flap-folding cylinders 190 and 192 are connected in such a way that their movement causes the short flap-folding fingers 194 and 196 to pivot on their base in an arc and come into contact with the short flaps 104 and 106 of the cardboard box 42. This contact causes the short flaps 104 and 106 of the cardboard box 42 to be pushed into the down position. The short flap-folding fingers 194 and 196 continue to stay in the down position, holding the short flaps 104 and 106 folded.

The long flaps 100 and 102 are now folded by the U-shaped bar 200 of the long flap-folding mechanism 28. The long flap-folding cylinder 198 actuates the U-shaped bar 200 causing it to rotate in a downward arc over its base. The U-shaped bar 200 simultaneously contacts both of the long flaps 100 and 102. This contact forces the long flaps 100 and 102 down on top of the two short flaps 104 and 106 that are

09487027.01.1900
already folded. The short flap-folding mechanisms 24 and 26 are placed in such a position that the long flaps 100 and 102 do not come to rest on top of the short flap-folding fingers 194 and 196 which are still in the down position.

The three flap-folding mechanisms 24, 26, and 28 represent a clear advantage. The loaded open-bottomed container does not need to be moved to have the flaps folded. As mentioned above, the open-bottomed container 42 is unfolded in exactly the right position to be loaded. This same loading position is also the one used when the flap-folding occurs, economizing movement and shortening the overall operation. The present embodiment incorporates three flap-folding mechanisms because of the nature of the flat-folded cardboard box shape. Other containers might incorporate a different number of flap-folding mechanisms depending on the configuration of the container.

The Box Out-Feed Pusher

As shown in Figures 1, 3A, and 6, the box out-feed pusher 30 comprises a box out-feed cylinder 202 and a box out-feed cylinder head 204. The box out-feed pusher 30 is operatively connected over the first conveyor 16 and next to the guide/support mechanisms 20 and 22 so that the box out-feed cylinder head 204 can contact the cardboard box 42.

After all of the flaps have been folded, the box out-feed pusher 30 extends. When the box out-feed pusher 30 extends the box folding mechanisms 24, 26 and 28 move back to their original positions to wait for the next box. As the box out-feed pusher 30 extends it pushes both the cardboard box 42, and the goods 44 inside of it, towards the second conveyor 32. The goods 44 inside of the cardboard box 42 move smoothly over the top the guide/support mechanisms 20 and 22. The second

conveyor 32 catches the cardboard box container 42 and the goods 44 and moves
2 them downstream towards the sealing mechanism 38 and labeling mechanisms 34 and
36.

4 **The Sealing and Labeling Mechanisms**

As is shown in Figure 7, the sealing mechanism comprises a standard sealing
6 mechanism 38 operatively connected above the second conveyor 32. The labeling
mechanisms 34 and 36 comprise units which are operatively attached to either side of
8 the second conveyor 32. As is shown in Figure 7, the third and fourth guide bars 206
and 208 are operatively connected over top of the second conveyor 32.

In this embodiment, the loaded cardboard box 42 and the goods 44 are pushed
12 onto the second conveyor 32 by the box out-feed pusher 30 as described above. The
second conveyor 32 moves the cardboard box 42 underneath the sealing mechanism
14 38 and in between the two labeling mechanisms 34 and 36. An improvement of this
machine is the ability to label and seal the machine in one step. The sealing
16 mechanism 38 and labeling mechanisms 34 and 36 work almost simultaneously upon
the loaded cardboard box 42. Because of the concurrent action, the cardboard box 42
18 is labeled and sealed in a quick and efficient manner.

In this embodiment, the sealing mechanism 38 is a taping machine. A taping
20 machine is particularly adapted for working on the type of cardboard box 42 used in
this embodiment. The taping machine 38 runs one continuous piece of tape starting
22 on the leading side of the cardboard box 42, over the top of the folded flaps of the
box, and then part of the way down the trailing edge 98. Other types of sealers known
24 in the art, such as a hot glue device, could likewise be incorporated into the machine.

On the left and right side are the two labeling mechanisms 34 and 36. In this
embodiment, the labeling mechanisms 34 and 36 are inkjet printers mounted so that
they print on the side of the cardboard box 42 as it is moved on the second conveyor
32. Other labeling devices could be substituted.

The third and fourth guide bars 206 and 208 are operatively connected above
and to the sides of the second conveyor 32 and perform much in the same way as the
first and second guide bars 124 and 126. As the cardboard box 42, loaded with the
goods 44 moves along the second conveyor 32, the third and fourth guide bars 206
and 208 come into contact with the sides of the cardboard box 42 to insure that the
cardboard box 42 does not fall off the side of the second conveyor 32. When the
goods 44 and the cardboard box 42 reach the end of the second conveyor 32, the
operator picks up the items. The operator may stack the packaged container on a
palette or deal with them in any manner so desired.

The Method of Operation

Figure 8 is a block diagram showing the method of operation of the invention.
This invention has several operations that are performed in a simultaneous fashion.
Each operation will be described as a separate action independent of the others that
are concurrently running. The last figure, Figure 9, shows a block diagram of the
interconnectivity of the various elements attached to and controlled by the Program
Logic Control ("PLC"). The PLC is the central processing unit and programming
platform that controls the operation of this invention. The following describes the
method incorporating the commands of the PLC. These acts are described in terms of
the embodiment that utilizes an open-bottomed container as the box and air pressure
as the means for moving the different cylinders which actuate most of the

mechanisms of the invention; both of these can be substituted with other means
2 known in the art.

Before the machine can begin the automatic unfolding, loading, and sealing of
4 the open-bottomed containers, the operator must insure that the magazine is filled
with the proper type of container to be used (block 250). In this embodiment open-
6 bottomed cardboard boxes are used.

As shown in Figure 9, the PLC is connected to the main power motor of the
8 invention 290. The PLC is also connected to box erector cylinder 292, the erector
suction cup vacuum 294, the various counters 296, the elevator lift apparatus 298, the
10 short flap-folding mechanisms 300, the long flap folding mechanism 302, the box out-
feed pusher 304, the labeling mechanisms 306, and the taping mechanism 308.

When the operator turns on the PLC it starts the main motor. Power is then
12 fed to the different motors and moving parts of the machine. The belt drive of the
first and second conveyors starts and runs continuously. In this embodiment the
14 taping machine may also be activated and run continuously.

This first act is the unfolding of the container. The container is opened in a
16 position above the elevator lift plate and ready to accept the goods to be packaged. In
this embodiment of the invention, the shape of the box is rectangular and orientated so
18 that the long part of the rectangle lays in the direction of conveyor operation. The
open-bottomed container could be orientated in different ways and the container itself
20 could be a different shape. In Figure 8, block 252, the PLC first commands the
cylinder for the box erector to extend. As the cylinder is extending, the PLC activates
22 the vacuum pump that is connected to the two suction cups. When the cylinder is
extended, it causes the suction cups to come into contact with the flat-folded
24

cardboard box. The PLC causes the extended cylinder to pause for an instant so that
2 the suction cups can seat themselves and stick to the flat-folded cardboard box. The
PLC then retracts the box erector cylinder (block 254). In order to open the container
4 in such a small area, actions of a shape guide and a popper mechanism aid the box
erector to insure the container will form the proper shape (block 256).

6 Once the open-bottomed container is properly formed (at blocks 254 and 256),
the goods are placed on the first conveyor (block 258) and move towards the elevator
8 lift apparatus (block 260). The goods pass through an upper guide and past a counting
mechanism. The upper guide insures that the goods are properly orientated when they
10 hit the stopping block. Counting insures that the proper number of goods come to rest
in front of the stopping block and over the top of the elevator lift apparatus before the
12 goods are raised into the open-bottomed container.

In this embodiment a photoelectric eye connected to the PLC does the
14 counting (Figure 9, block 296). This photoelectric-eye sensor counts the goods to be
packaged as they pass by on the first conveyor. When the proper number is counted
16 and the cardboard box has been unfolded, the PLC commands the elevator lift
apparatus to lift the goods into the bottom of the now open-bottomed cardboard box
18 (block 262).

Once the correct number of goods reaches the stopping block in the correct
20 orientation, the elevator lift apparatus raises the goods into the open-bottomed
container (block 262). The lifting motion can be performed by any number of
22 methods known to one skilled in the art. The goods are guided into the box by two
guide/support mechanisms to prevent fouling. In this embodiment, these guides are
24 strictly mechanical in nature and are not connected to the PLC. These guide/support

mechanisms are designed in such a way that the upper edge of the goods being raised
2 into the box can not catch and foul the bottom edge of the open-bottomed container.

The elevator lift apparatus continues to lift the goods until the lower edge of
4 the goods clears the top edge of the guide/support mechanisms. At this point the
guide/support mechanisms snap back down into their rest position (block 264). After
6 the elevator lift plate lifts the goods to the elevator lift apparatus' highest level, the
PLC will command the lift plate to start to move back to its lower position (block
8 264). The guide/support mechanisms are placed at such a width that the elevator lift
plate can fit between them at the angled rest position.

10 As the elevator lift plate lowers, the elevator lift plate fits between the two
guide/support mechanisms. The goods, however, catch on the top edge of the
12 guide/support mechanisms and come to a rest. As the goods rest on the guide/support
mechanisms they remain inside of the open-bottomed container (block 264). The
14 elevator lift plate continues back to its lowest position and awaits the arrival of more
goods to lift into the next properly positioned open-bottomed container.

16 At this point the upper flaps of the open-bottomed container are folded. First,
the two smaller flaps are folded by the action of two separate devices (block 266).

18 Each device has a cylinder positioned above and at each end of the open-bottomed
container. The PLC activates the cylinders powering these flap-folders. These
20 individual cylinders move in a downward arc, contacting each one of the smaller
flaps, pushing them until they come to rest in a roughly horizontal plane. These two
22 cylinders remain in this position, holding down the two smaller flaps while the larger
two flaps are folded. The PLC commands the same type of air cylinder to move the
24 U-shaped long flap-folding mechanism as it did for the short flap-folding mechanism.

The long flap-folding mechanism in this embodiment is in the form of a U-shaped bar. At the command of the PLC (block 268), the long U-shaped bar rotates down in an arc, contacting both of the long cardboard box flaps and folding them until they are horizontal. The PLC leaves all three of these flap-folding mechanisms in place until the box out-feed pusher has been activated. The flap-folding mechanisms in this embodiment are air powered, but any way of moving the devices known in the art would suffice.

Once the flaps are properly folded, the box out-feed pusher acts to drive the open-bottomed cardboard box onto the second conveyor (block 270). After the PLC has commanded the three flap-folding devices to each perform their function, the PLC instructs the box out-feed pusher to push the loaded open-bottomed container onto the second conveyor. When the out-feed pusher has extended to its furthest point, the PLC causes the same to return back to its original position. As the second conveyor starts to move the open-bottomed container, the PLC commands the three separate box folding mechanisms to move back into their up positions (block 272).

The second conveyor now moves the open-bottomed cardboard box through the last step in the packaging operation. As the second conveyor moves the open-bottomed cardboard box loaded with the goods, the open-bottomed cardboard box passes by the two labeling mechanisms positioned on opposite sides of the conveyor belt (block 274). In this embodiment, the two labeling mechanisms are standard inkjet printers that automatically print on the box as it goes by, with no connection to the PLC necessary. In addition, the folded top flaps of the container are sealed (block 276). In this embodiment a standard taping device known to those in the art seals the flaps. The open-bottomed cardboard container, with the goods inside, then reaches

the end of the second conveyor, and the end of the machine (block 278). While the
2 sealing and taping is going on for one box, the PLC is opening another box over the
elevator lift plate to receive more goods from the first conveyor.

4 When the open-bottomed container reaches the end of the machine, the open-
bottomed container may be stacked on a palette for delivery to a customer. In one
6 embodiment, the open-bottomed container packaged with goods are stacked on a
palette and transported to a customer. It should be noted that in order to access these
8 goods, the open-bottomed container need not be cut open. Rather, the goods may be
accessed by simply lifting the open-bottomed container.

10 Although the description of this machine and the present embodiment has
been quite specific, it is contemplated that various deviations can be made to this
12 embodiment without deviating from the scope of the present invention. Accordingly,
it is intended that the scope of the present invention be dictated by the appended
14 claims rather than by the foregoing description of this embodiment.

CLAIMS

2 What is claimed is:

4 1. An apparatus for packaging goods in a box, comprising:

(a) a box erecting apparatus for erecting a box to receive at least one
6 good; and

(b) an elevator lift apparatus operatively connected below the box
8 erecting apparatus, such that the elevator lift apparatus is positioned to lift at least one
good into the erected box.

10 2. The apparatus of claim 1, wherein the box is an open-bottomed box.

3. The apparatus of claim 2, wherein the box is a cardboard box.

12 4. The apparatus of claim 2, further comprising a finishing apparatus for
sealing the open-bottomed box, wherein the finishing apparatus is operatively
14 connected to the box erecting apparatus.

5. The apparatus of claim 4, further comprising a magazine for storing
16 open-bottomed boxes adapted to be erected by the box erecting apparatus.

6. The apparatus of claim 5, further comprising a labeling apparatus
18 operatively connected to the finishing apparatus.

7. The apparatus of claim 6, further comprising a first conveyor defining
20 a first conveyor plane positioned to deliver goods to the elevator lift apparatus.

8. The apparatus of claim 7, further comprising a second conveyor
22 defining a second conveyor plane positioned to transport the goods through the
finishing and labeling apparatuses.

24 9. The apparatus of claim 8, wherein the box erecting apparatus
comprises at least one suction cup.

10. An apparatus for packaging goods in an open-bottomed container, the
2 apparatus comprising:

(a) an elevator lift apparatus for lifting at least one good through a
4 bottom of the open-bottomed container; and

(b) a support mechanism operatively connected to the elevator lift
6 apparatus for supporting the at least one good in the open-bottomed container.

11. The apparatus of claim 10, wherein the support mechanism further acts
8 as a guide mechanism to funnel the goods into the open-bottomed container.

12. The apparatus of claim 10, further comprising a box erector apparatus
10 to erect an open-bottomed container.

13. The apparatus of claim 12, further comprising:

(a) a closing mechanism operatively attached to the elevator lift
12 apparatus for closing a top portion of the open-bottomed container; and

(b) a finishing apparatus operatively attached to the closing
14 mechanism for sealing a top portion of the open-bottomed container.

16 14. The apparatus of claim 13, wherein the support mechanism for the box
comprises a first and second support mechanism.

18 15. The apparatus of claim 14, further comprising a first conveyor,
operatively connected to the elevator lift apparatus, the first conveyor having a
20 starting end and a finishing end.

22 16. The apparatus of claim 15, further comprising a second conveyor
situated at the finishing end of the first conveyor, the second conveyor positioned on a
second conveyor plane.

24 17. The apparatus of claim 16, the first conveyor belt further comprising a

left belt and a right belt, the left belt and the right belt defining an open space.

2 18. The apparatus of claim 17, wherein the elevator lift apparatus is
operatively connected in the open space of the first conveyor at the finishing end, the
4 elevator lift apparatus having a first position on a plane just lower than the first
conveyer plane and having a second position situated generally level with the second
6 conveyer plane.

 19. The apparatus of claim 18, wherein the second conveyer plane is on a
8 higher level than the first conveyer plane.

 20. The apparatus of claim 19, further comprising a stopping block
10 situated at the finishing end of the first conveyer adapted to stop the goods over the
elevator lift apparatus.

12 21. The apparatus of claim 20, further comprising a pushing mechanism
operatively connected to the first conveyer for pushing the open-bottomed container
14 off of the supporting mechanism onto the second conveyer.

 22. The apparatus of claim 21, further comprising a labeling apparatus
16 operatively connected to the second conveyor.

 23. The apparatus of claim 22, further comprising a guide mechanism
18 operatively connected to the elevator lift apparatus for guiding the goods into the
unfolded open-bottomed container.

20 24. The apparatus of claim 10, the apparatus further comprising a meter
mechanism operatively connected to the elevator lift apparatus situated to count the
22 goods moving from the starting end to the finishing end.

 25. The apparatus of claim 13, wherein the open-bottomed container is a
24 cardboard box.

2

26. The apparatus of claim 24, further comprising a cardboard box
4 magazine for storing multiple boxes accessibly positioned to the box erecting
apparatus, the box having a first and second minor flap and a first and second major
6 flap.

27. The apparatus of claim 26, further comprising:

8 (a) a first flap folding mechanism operatively attached to the first
conveyor at the finishing end adapted to fold the first and second minor flaps of the
10 open-bottomed container; and

(b) a second flap folding mechanism operatively attached to the
12 conveyer for folding the first and second major flaps of the open-bottomed container.

28. A method of packaging goods in a box, the method comprising:

14 (a) actuating an elevator lift apparatus to raise the goods into the
box; and

16 (b) supporting the goods in the box after the elevator lift apparatus
is lowered.

18 29. The method of claim 28, further comprising closing a top portion of
the box.

20 30. The method of claim 28, further comprising:

(a) providing the goods to be packaged;

22 (b) placing the goods on an first conveyor; and

(c) moving the goods with a first conveyor to a position over the
24 top of the elevator lift apparatus.

09467027-011900
31. The method of claim 28, further comprising counting the goods to
2 confirm the appropriate number.

32. The method of claim 28, wherein the box is an open-bottomed
4 cardboard box.

33. The method of claim 30, further comprising sealing a top portion of the
6 box.

34. The method of claim 33, further comprising:

8 (a) stacking the sealed boxes enclosing the goods onto a palette; and

(b) packaging the stacked open-bottomed containers on the palette.

10 35. A method for packaging goods in an open-bottomed container, wherein
the open-bottomed container is an open-bottomed cardboard box with four upper
12 flaps, comprising:

(a) unfolding the open-bottomed cardboard box;

14 (b) holding the unfolded open-bottomed cardboard box above the
elevator lift apparatus;

16 (c) activating an elevator lift apparatus to raise the goods into the
open-bottomed cardboard box; and


18 (d) folding the four upper flaps of the open-bottomed cardboard
box.

20 36. The method of claim 35, further comprising providing multiple the
open-bottomed containers by a flat folded cardboard open-bottomed container
22 dispensing apparatus.

37. A method for delivering goods comprising transporting goods
2 packaged in open-bottomed containers on a palette whereby the goods may be
accessed by lifting the open-bottomed container.

ABSTRACT

2 One embodiment of the present invention relates to an apparatus for packaging
goods in a box. The apparatus comprises a box erecting apparatus for erecting the
4 box to receive at least one good. The apparatus further comprises an elevator lift
apparatus operatively positioned below the box erecting apparatus, such that the
6 elevator lift apparatus is positioned to lift at least one good into the erected box.

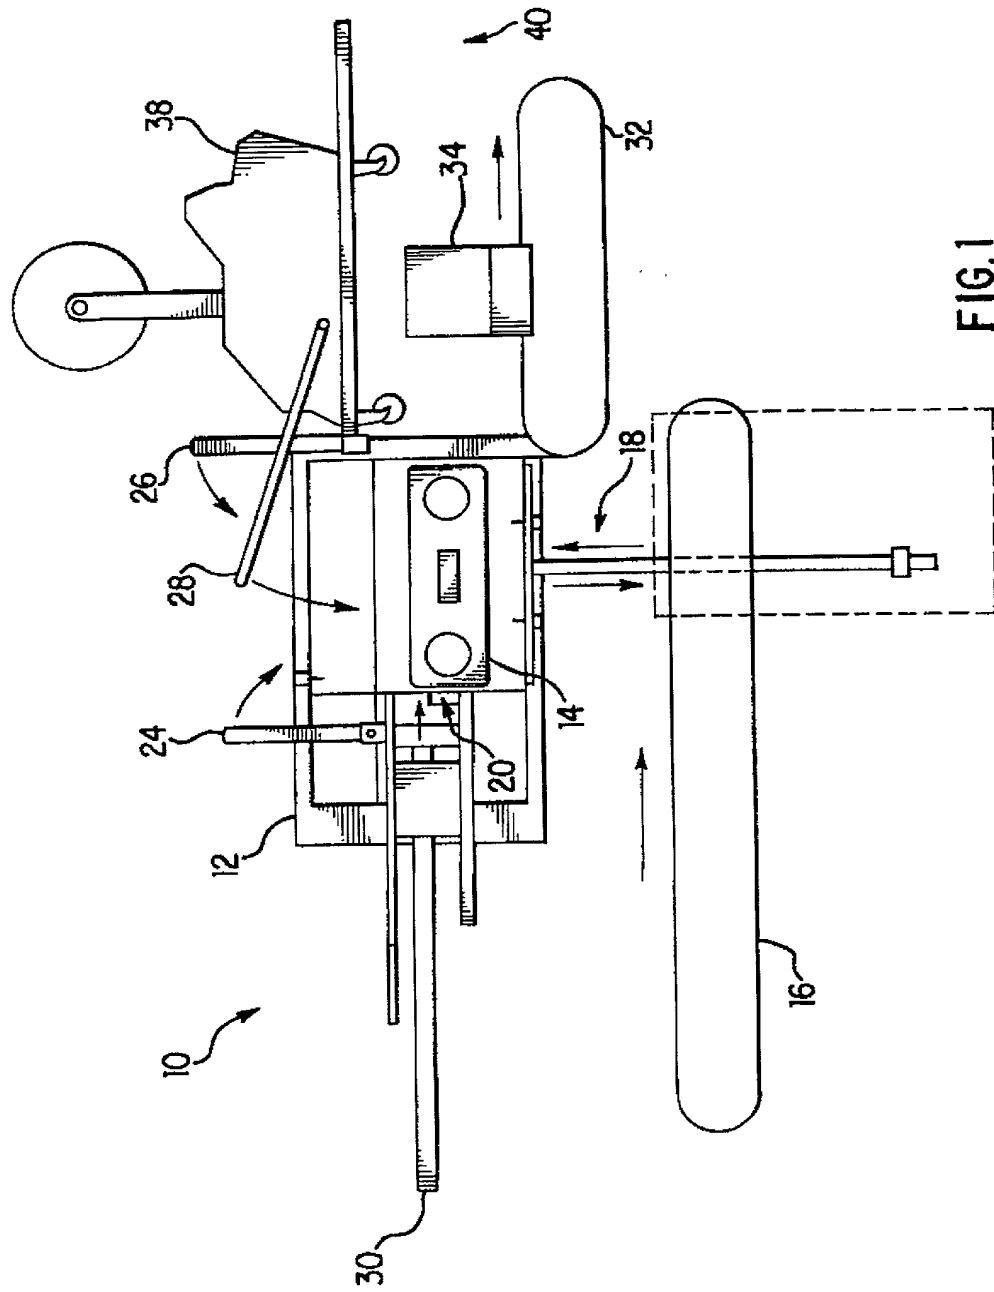

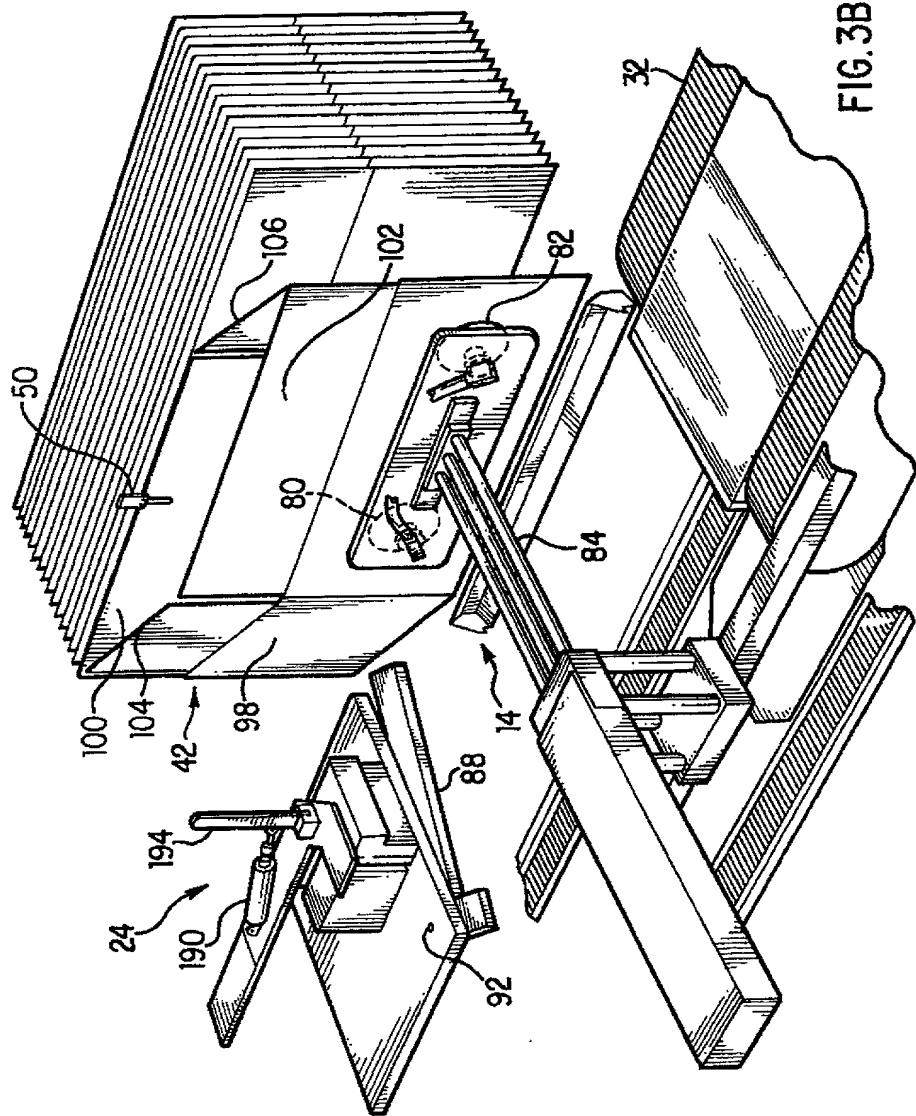


FIG. 3B

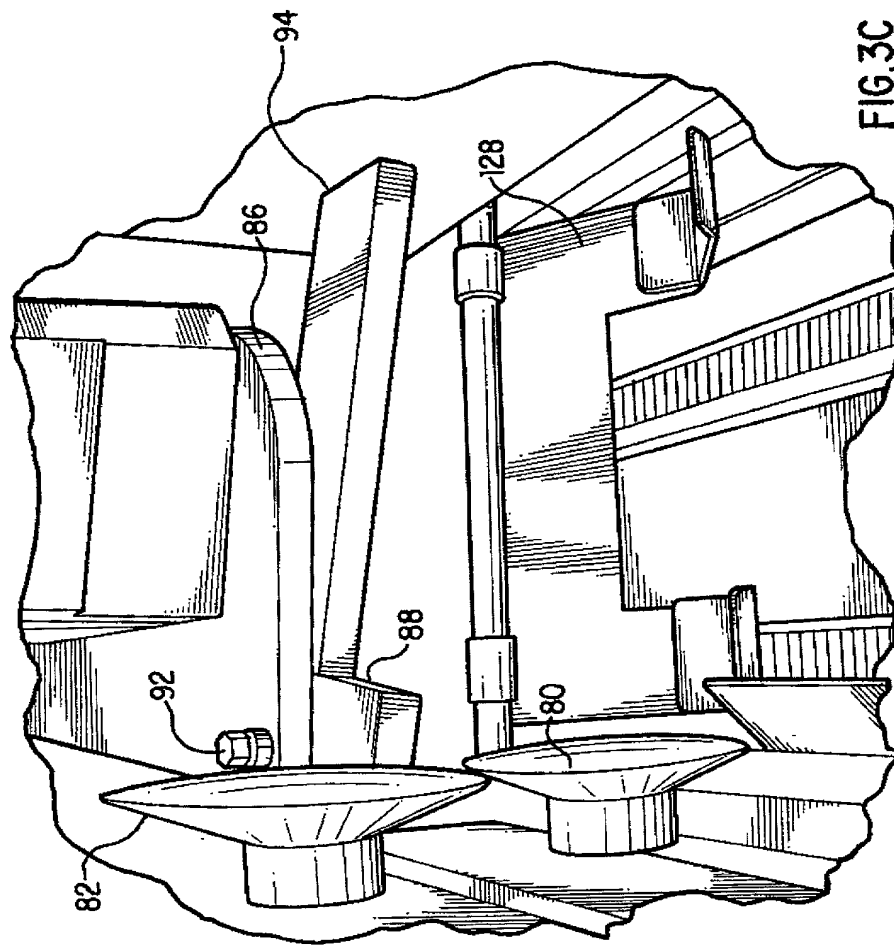


FIG. 3C

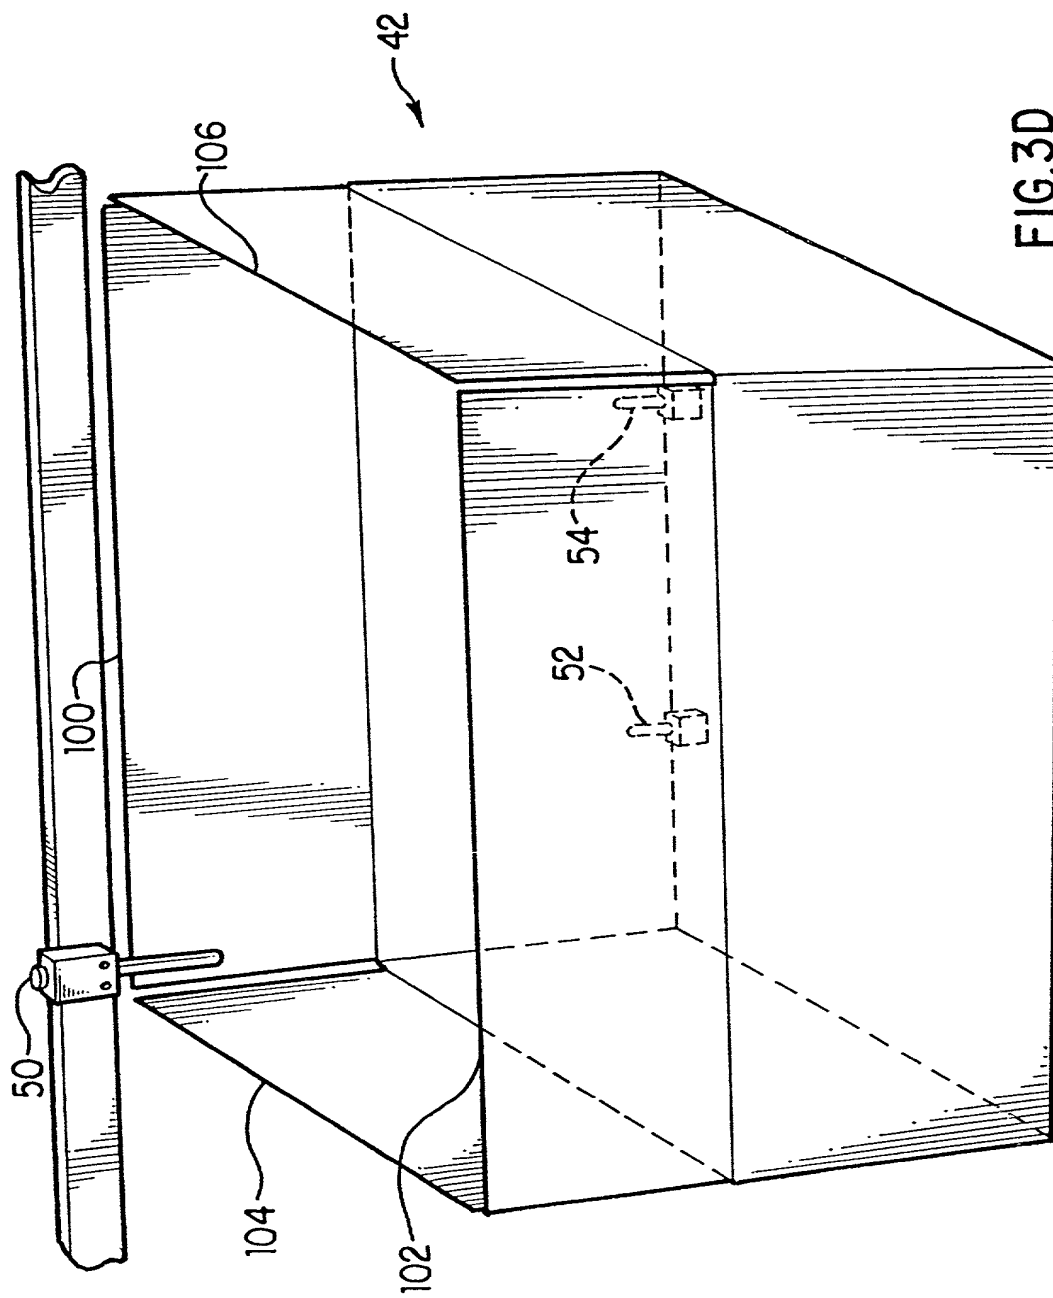


FIG. 3D

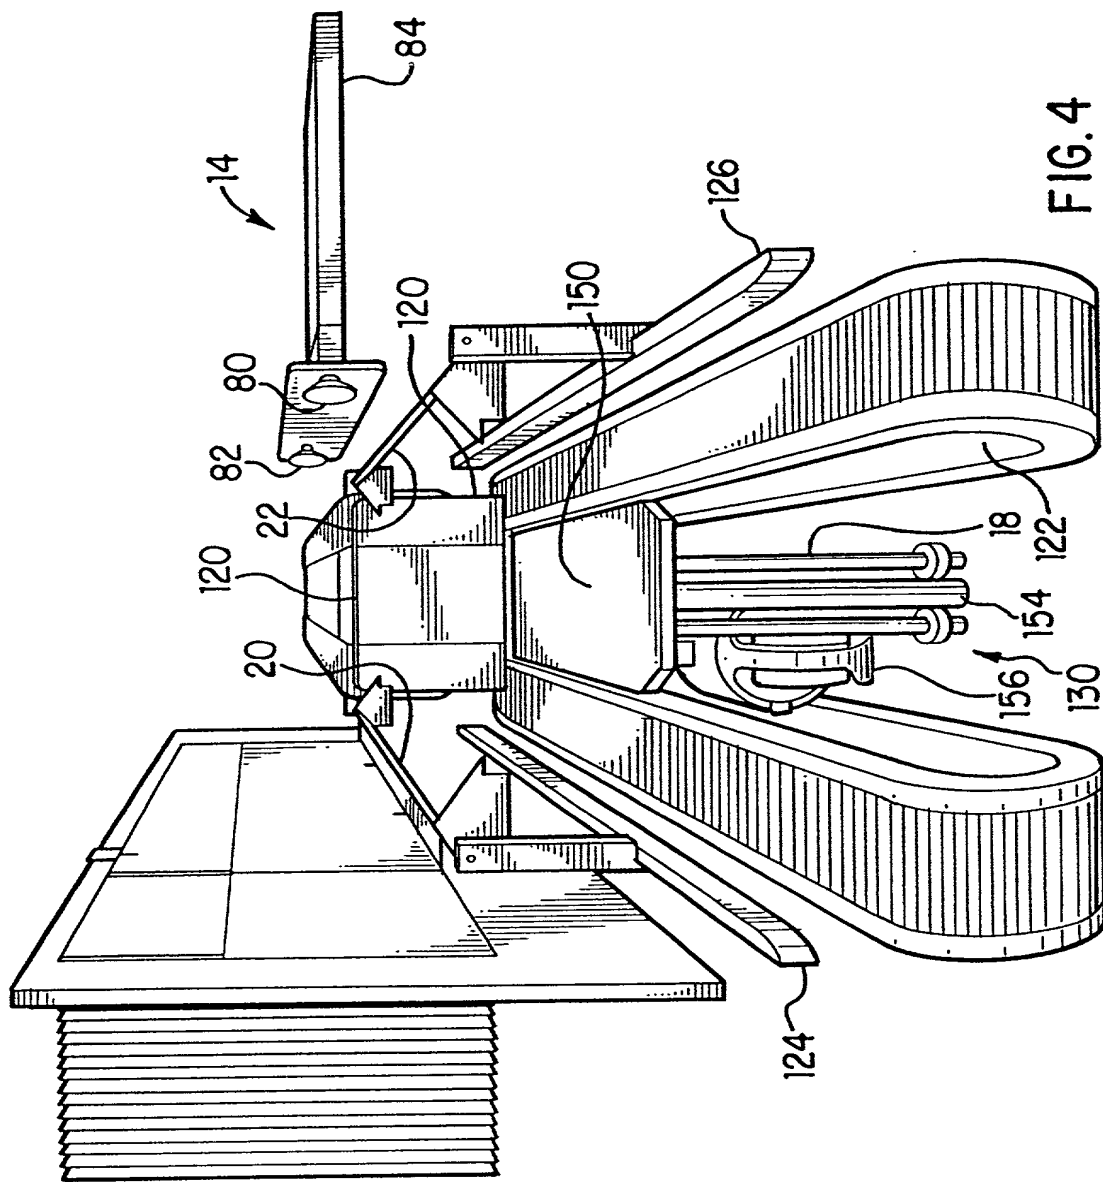


FIG. 4

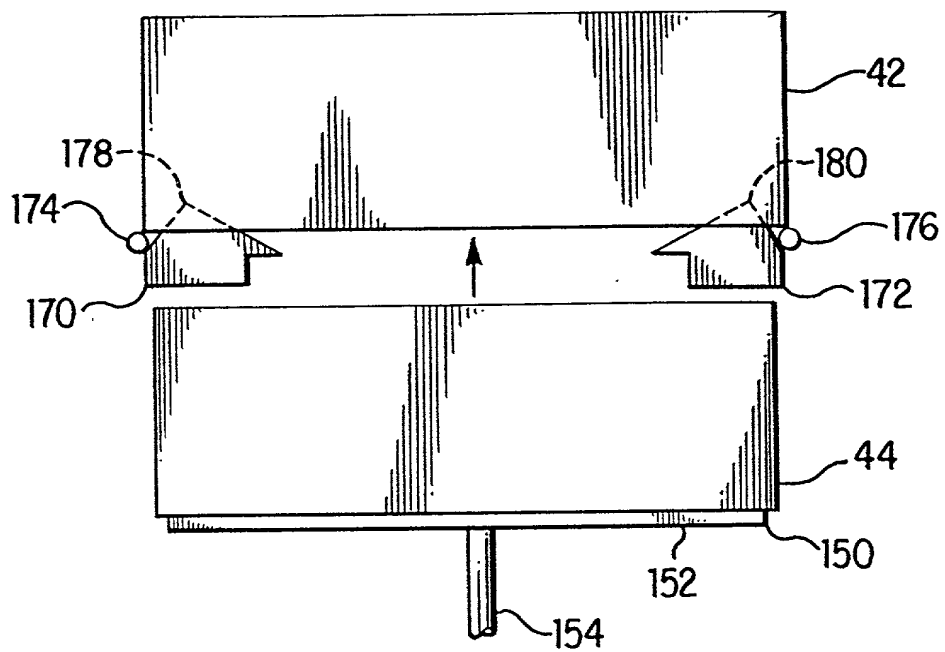


FIG. 5a

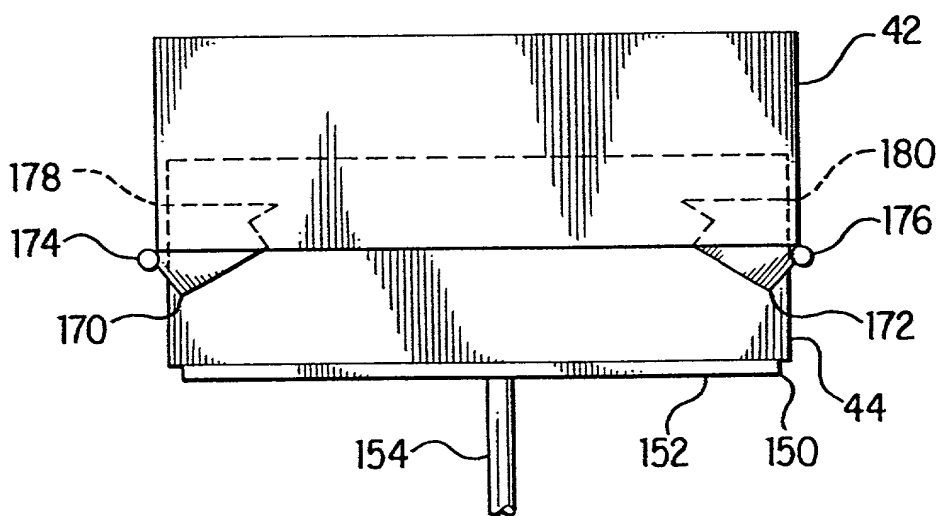


FIG. 5b

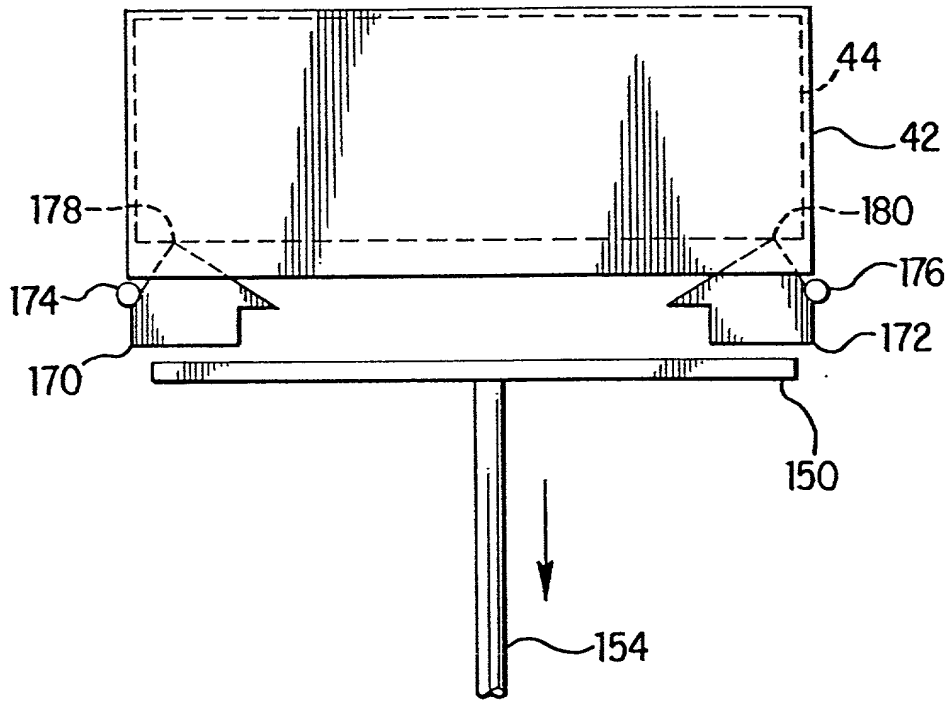


FIG.5c


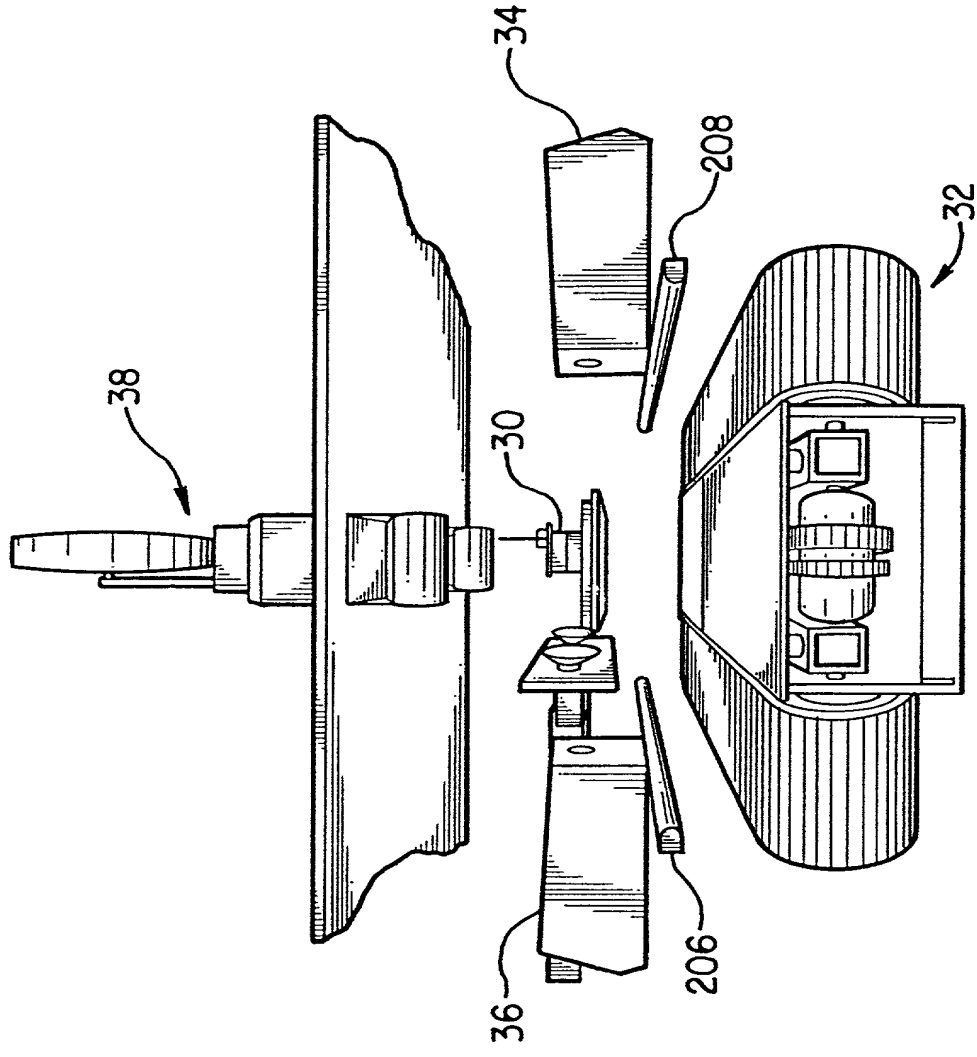



FIG. 7

Fig. 8

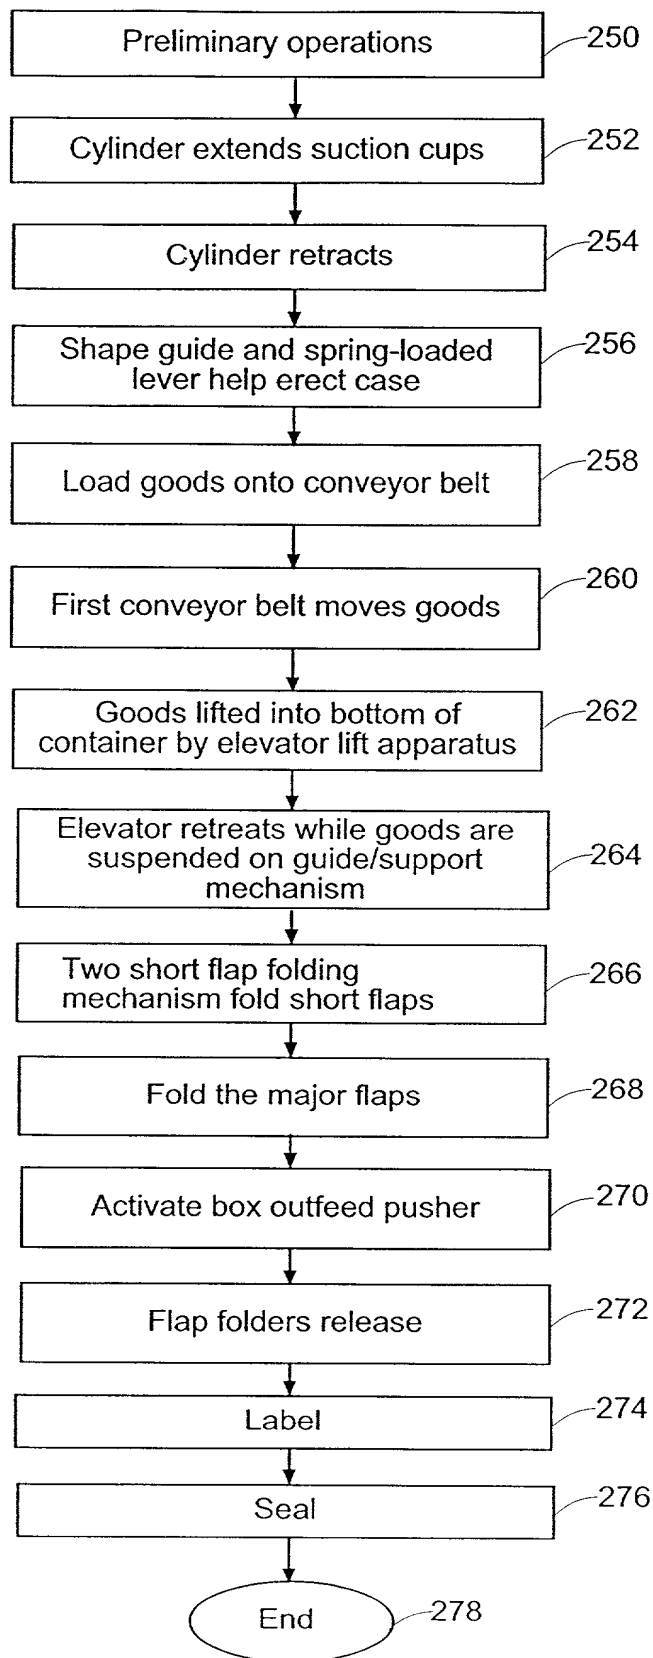

09487027 011900

Fig. 9

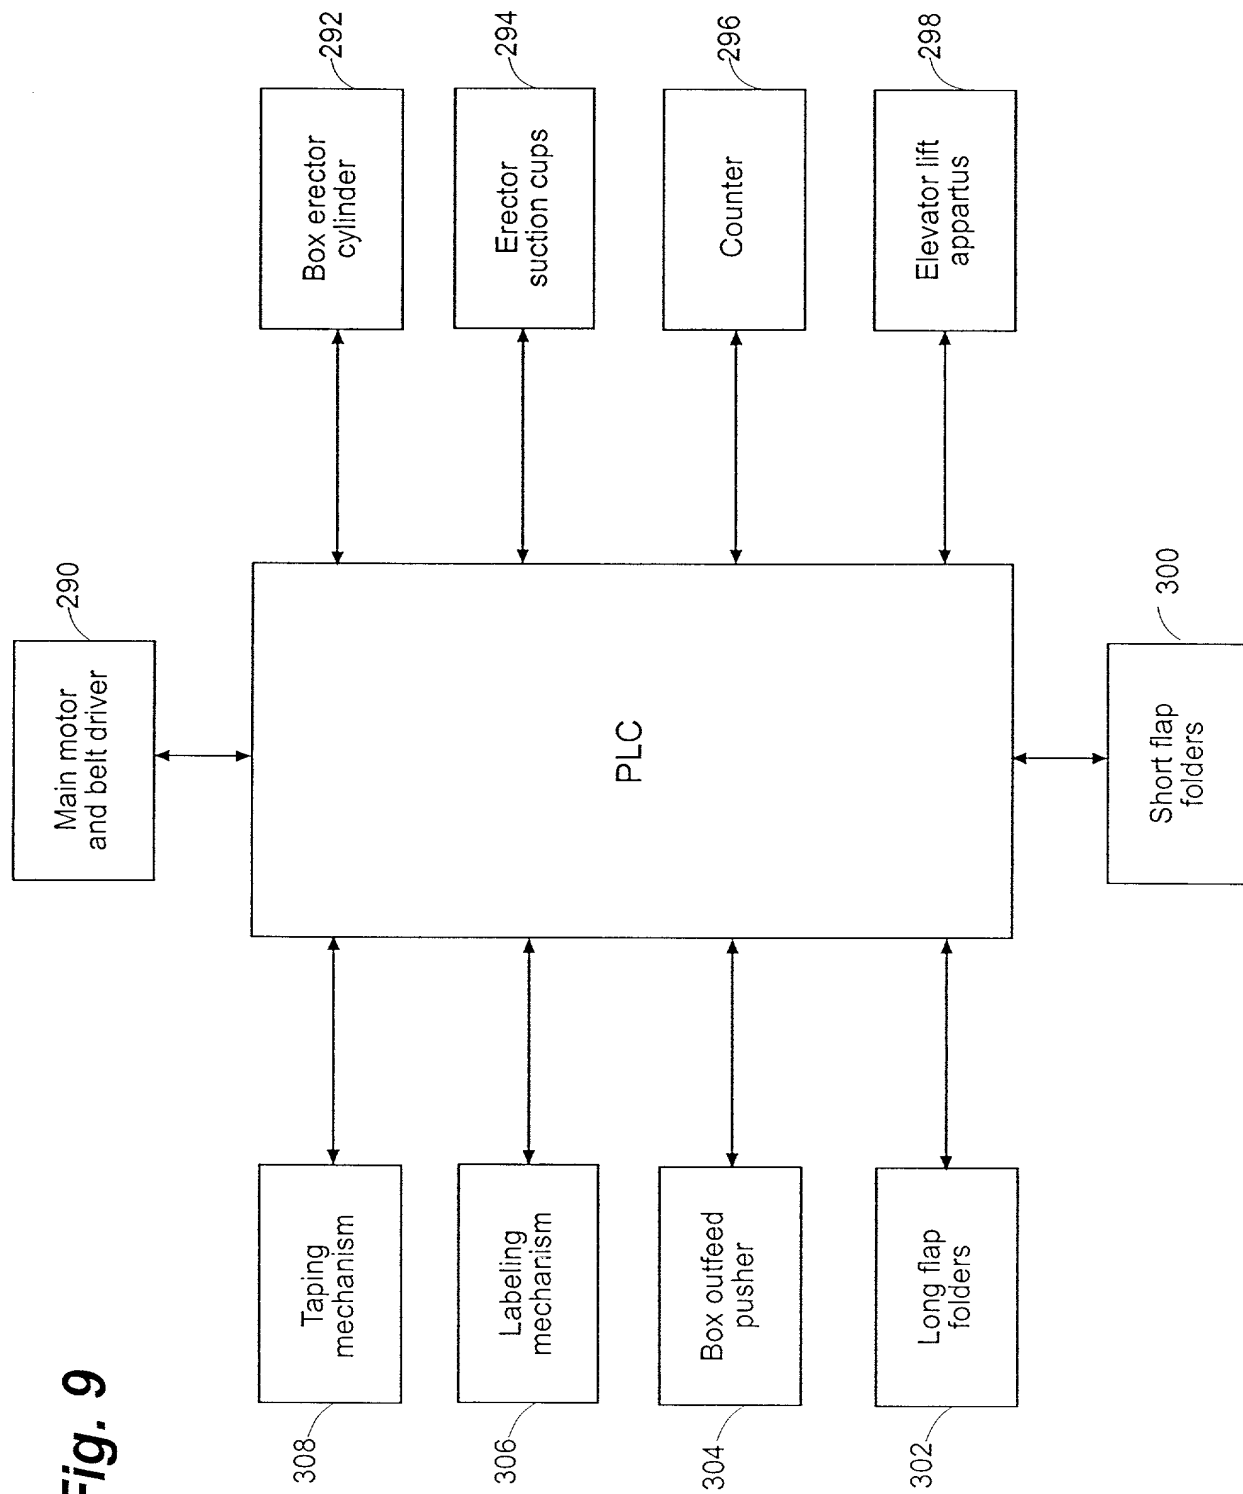

DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are list below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

AN APPARATUS FOR PACKAGING GOODS IN AN OPEN-BOTTOMED CONTAINER
AND METHOD FOR DOING THE SAME

the specification of which

☐ is attached hereto.

☐ was filed on _____ as

Application Serial No. _____

and was amended on _____.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claim(s), as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Sec. 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, Sec. 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

(Number) (Country) (Day/Month/Year Filed)

☐ Yes ☐ No

(Number) (Country) (Day/Month/Year Filed)

☐ Yes ☐ No

(Number) (Country) (Day/Month/Year Filed)

☐ Yes ☐ No

I hereby claim the benefit under Title 35, United States Code, Sec. 120 of any United States application(s) listed below and insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Sec. 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Sec. 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

09467027.011900

(Application Serial No.) (Filing Date) (Status: patented, pending, or abandoned)

(Application Serial No.) (Filing Date) (Status: patented, pending, or abandoned)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

O'Toole, John A. (Reg. No. 28,336)
Taylor, Douglas J. (Reg. No. 32,945)
Kamrath, Alan D. (Reg. No. 28,227)
Diederiks, Everett G., Jr. (Reg. No. 33,323)
Padmanabhan, Devan V. (Reg. No. 38,262)

Send correspondence to:

John A. O'Toole, Esq. P.O. Box 1113, Minneapolis, Minnesota 55440, Phone: 612-764-2422

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor DIMARIO PAUL E

Inventor's Signature _____

Date

Residence: 1 TAFT STREET, LAWRENCE, MA 01844

Citizenship: UNITED STATES

Post Office Address: Same as residence

Full name of second joint inventor, if any CARRAGHER FRANCIS H

Second Inventor's Signature _____

Date

Residence: 20 HOBBS ROAD, PELHAM, NH 03076

Citizenship: UNITED STATES

Post Office Address: Same as residence

Full name of third joint inventor, if any HALL JAMES M

Third Inventor's Signature _____

Date

Residence: 279 OLD BENNINGTON ROAD, PETERBOROUGH, NH 03458

Citizenship: UNITED STATES

Post Office Address: Same as residence

09487027-011900